


features

- Excellent for high frequency applications
- Low DC resistance and high Q
- Operating temperature: -40°C ~ +125°C
- Low tolerance ±2% available
- Small size allows for high density mounting (1E, 1J, 2A, 2B)
- Marking: Yellow marking on blue protective coating (1E, 1J, 2A, 2B)
- Products with lead-free terminations meet EU RoHS and China RoHS requirements
- AEC-Q200 Qualified

dimensions and construction

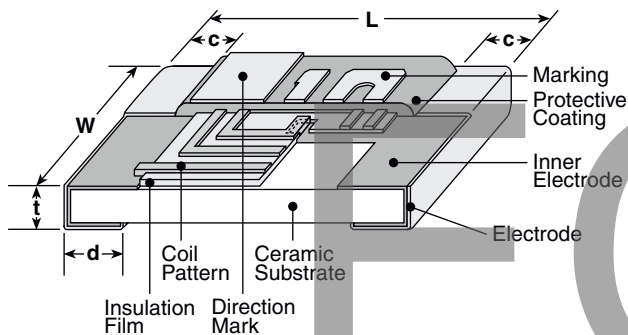

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
1E (0402)	.039±.004 (1.0±0.1)	.02±.002 (0.5±0.05)	.006±.004 (0.15±0.1)	.01±.004 (0.25±0.1)	.014±.002 (0.35±0.05)
1J (0603)	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.02±.004 (0.5±0.1)
2A (0805)	.079±.008 (2.0±0.2)	.049±.008 (1.25±0.2)	.016±.008 (0.4±0.2)	.012±.004 (0.3±0.2)	.02±.004 (0.5±0.1)
2B (1206)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.02±.008 (0.5±0.2)	.016 ^{+0.008} _{-0.004} (0.4 ^{+0.2} _{-0.1})	.024±.004 (0.6±0.1)

Inductance Marking

Part 1J (nH)	Marking	Part 1J (nH)	Marking
1.0	L1	10	10
1.2	L2	12	12
1.5	L3	15	15
1.8	L4	18	H1
2.2	22	22	H2
2.7	27	27	H3
3.3	33	33	H4
3.9	39	39	H5
4.7	47	47	H6
5.6	56	56	H7
6.8	68	68	H8
8.2	82	82	H9

Part Marking	Value (nH) 2.2 - 8.2	Value (nH) 10 and higher
2A	Ex. = 2.2 = 2.2nH	Ex. = 15 = 15nH
2B	Ex. = 2N2 = 2.2nH	Ex. = 15N = 15nH

No marking on 1E (0402)

ordering information

New Part #	KL73	2A	T	TE	4N7	G
Type						
Size Code		1E: 0402 1J: 0603 2A: 0805 2B: 1206				
Termination Material			T: Sn			
Packaging				TP: 7" paper 2mm pitch (1E only - 10,000 pieces/reel) TE: 7" embossed plastic 4mm pitch (1J, 2A, 2B - 4,000 pieces/reel)		
Nominal Inductance					4N7: 4.7nH 47N: 47nH	
Tolerance						B: ±0.1nH C: ±0.2nH G: ±2% J: ±5%

For further information on packaging, please refer to Appendix A.

applications and ratings

Part Designation	Nominal Inductance (nH)	Inductance Tolerance	Quality Factor Minimum	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)	Measured Frequency (MHz)**		
KL731ETTPN56B	0.56	B: ± 0.1 nH	7	14000	0.10	700	500		
KL731ETTPN68B	0.68								
KL731ETTPN82B	0.82								
KL731ETTP1N0*	1.0	B: ± 0.1 nH C: ± 0.2 nH	10	12000	0.15	500			
KL731ETTP1N2*	1.2			10000	0.20				
KL731ETTP1N5*	1.5								
KL731ETTP1N8*	1.8			8000	0.25				
KL731ETTP2N2*	2.2								
KL731ETTP2N7*	2.7			6000	0.30				
KL731ETTP3N3*	3.3								
KL731ETTP3N9*	3.9			5000	0.50				
KL731ETTP4N7*	4.7								
KL731ETTP5N6*	5.6			4000	1.00				
KL731ETTP6N8*	6.8								
KL731ETTP8N2*	8.2	3000	1.50						
KL731ETTP10N*	10								
KL731ETTP12N*	12	2000	2.00						
KL731ETTP15N*	15								
KL731ETTP18N*	18	1500	3.00						
KL731ETTP22N*	22								
KL731ETTP27N*	27	1000	5.00						
KL731ETTP33N*	33								
KL731JTTE1N0*	1.0	C: ± 0.2 nH	10	13000	0.10	650	500		
KL731JTTE1N2*	1.2		15						
KL731JTTE1N5*	1.5		10000					8000	0.15
KL731JTTE1N8*	1.8								
KL731JTTE2N2*	2.2		6000					0.25	
KL731JTTE2N7*	2.7								
KL731JTTE3N3*	3.3		5000					0.50	
KL731JTTE3N9*	3.9								
KL731JTTE4N7*	4.7		4000					1.0	
KL731JTTE5N6*	5.6								
KL731JTTE6N8*	6.8	3000	1.50						
KL731JTTE8N2*	8.2								
KL731JTTE10N*	10	2500	2.00						
KL731JTTE12N*	12								
KL731JTTE15N*	15	2000	2.50						
KL731JTTE18N*	18								
KL731JTTE22N*	22	1500	4.00						
KL731JTTE27N*	27								
KL731JTTE33N*	33	1000	4.50						
KL731JTTE39N*	39								
KL731JTTE47N*	47	600	4.50						
KL731JTTE56N*	56								
KL731JTTE68N*	68	100	4.50						
KL731JTTE68N*	68								

* Add tolerance character (B, C, G, J)

** The operating temperature range of the coil (ambient temperature + self heating) must remain at +125°C or less

For complete environmental specifications, please refer to www.koaspeer.com

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/01/14

applications and ratings (continued)

Part Designation	Nominal Inductance (nH)	Inductance Tolerance	Quality Factor Minimum	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)	Measured Frequency (MHz)**
KL732ATTE1N0*	1.0	C: $\pm 0.2\text{nH}$	20	13000	0.25	900	500
KL732ATTE1N2*	1.2			10000			
KL732ATTE1N5*	1.5						
KL732ATTE1N8*	1.8		9000	800			
KL732ATTE2N2*	2.2					8000	
KL732ATTE2N7*	2.7						
KL732ATTE3N3*	3.3		6000	700			
KL732ATTE3N9*	3.9				5000		
KL732ATTE4N7*	4.7						
KL732ATTE5N6*	5.6		4500	500			
KL732ATTE6N8*	6.8				4000		
KL732ATTE8N2*	8.2						
KL732ATTE10N*	10		3000	400			
KL732ATTE12N*	12				2500		
KL732ATTE15N*	15						
KL732ATTE18N*	18	2000	300				
KL732ATTE22N*	22			1500			
KL732ATTE27N*	27						
KL732ATTE33N*	33	1000	200				
KL732ATTE39N*	39			800			
KL732ATTE47N*	47						
KL732ATTE56N*	56	700	150				
KL732ATTE68N*	68			4.00			
KL732ATTE82N*	82						
KL732ATTE82N*	82	600	150				
KL732BTTE2N2*	2.2			9000			
KL732BTTE2N7*	2.7				7000		
KL732BTTE3N3*	3.3	6000	1000				
KL732BTTE3N9*	3.9			5000			
KL732BTTE4N7*	4.7						
KL732BTTE5N6*	5.6	4000	900				
KL732BTTE6N8*	6.8			3500			
KL732BTTE8N2*	8.2						
KL732BTTE10N*	10	3000	800				
KL732BTTE12N*	12			2500			
KL732BTTE15N*	15						
KL732BTTE18N*	18	2000	500				
KL732BTTE22N*	22			1500			
KL732BTTE27N*	27						
KL732BTTE33N*	33	1000	400				
KL732BTTE39N*	39			1000			
KL732BTTE47N*	47						
KL732BTTE56N*	56	500	200				
KL732BTTE68N*	68			500			
KL732BTTE82N*	82						
KL732BTTE82N*	82	400	200				
KL732BTTE100*	100						

* Add tolerance character (B, C, G, J)

** The operating temperature range of the coil (ambient temperature + self heating) must remain at +125°C or less

For L-Frequency and Q-Frequency Characteristics, see Environmental Applications at www.koaspeer.com





environmental applications

Performance Characteristics





Parameter	Requirements Maximum Limit	Δ L/L Δ Q/Q Typical	Test Method
Resistance to Soldering Heat	Without distinct damage in appearance and construction Δ L/L: $\pm 2\%$, Δ Q/Q: $\pm 20\%$	Δ L/L: $\pm 0.5\%$ Δ Q/Q: $\pm 1.5\%$	260°C \pm 5°C, 10s \pm 1s
Rapid Change of Temperature	Without distinct damage in appearance and construction Δ L/L: $\pm 2\%$, Δ Q/Q: $\pm 20\%$	Δ L/L: $\pm 0.5\%$ Δ Q/Q: $\pm 1.6\%$	-40°C (30min.)/ +125°C (30min.) 100 cycles
Low Temperature Exposure	Without distinct damage in appearance and construction Δ L/L: $\pm 2\%$, Δ Q/Q: $\pm 20\%$	Δ L/L: $\pm 0.7\%$ Δ Q/Q: $\pm 1.2\%$	-40°C \pm 3°C, 1000h
High Temperature Exposure	Without distinct damage in appearance and construction Δ L/L: $\pm 2\%$, Δ Q/Q: $\pm 20\%$	Δ L/L: $\pm 0.4\%$ Δ Q/Q: $\pm 1.3\%$	125°C \pm 2°C, 1000h
Moisture Exposure	Without distinct damage in appearance and construction Insulation resistance: 50M Ω or more Δ L/L: $\pm 2\%$, Δ Q/Q: $\pm 20\%$	Δ L/L: $\pm 0.4\%$ Δ Q/Q: $\pm 1.4\%$	40°C \pm 2°C, 90%~95%RH, 1000h
Resistance to Solvent	Without distinct damage in appearance, construction and marking Δ L/L: $\pm 2\%$, Δ Q/Q: $\pm 20\%$	Δ L/L: $\pm 0.6\%$ Δ Q/Q: $\pm 1.2\%$	Immerse the inductors for 30s \pm 5s in the reagent (20°C ~ 25°C) of JIS K8839 (1995)

Frequency Characteristics Test equipment: HP4291B impedance analyzer (1E, 1J, 2A, 2B)

L - Frequency Characteristics

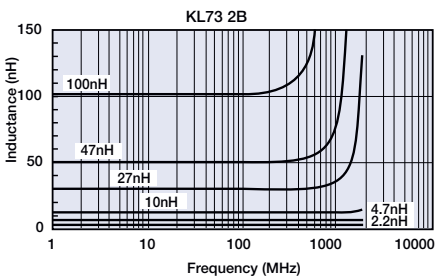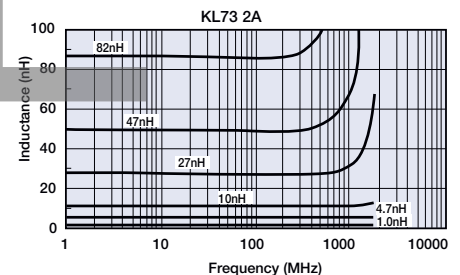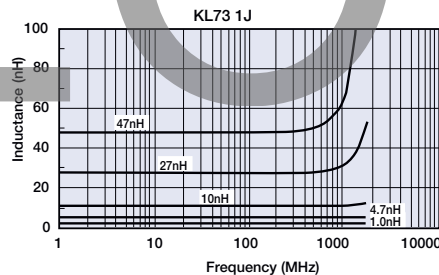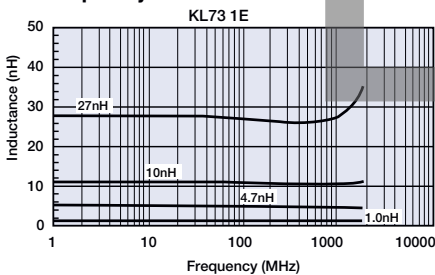

Q - Frequency Characteristics

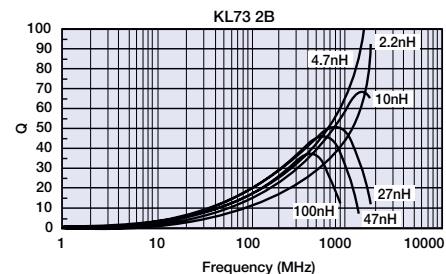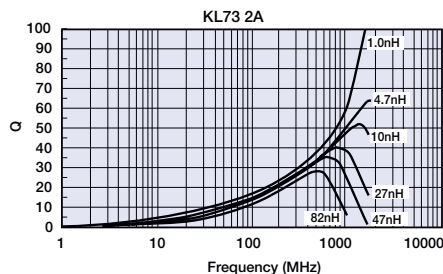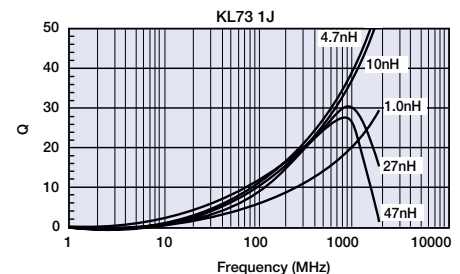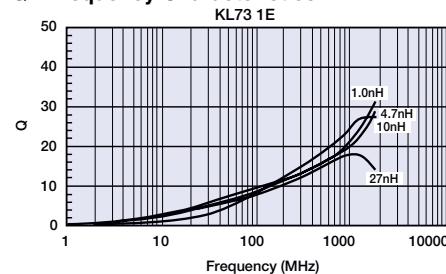

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/21/14