



platinum thin film thermal chip sensors (for automotive)

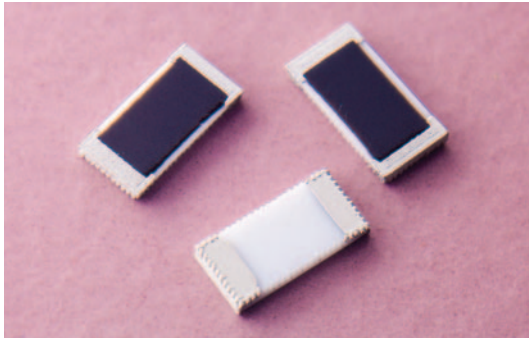

features

- SMD platinum thin film thermal sensors
- T.C.R. is in accordance to JIS IEC standards
- Suitable for both flow and reflow solderings
- Products meet EU RoHS requirements
- AEC-Q200 Tested

dimensions and construction

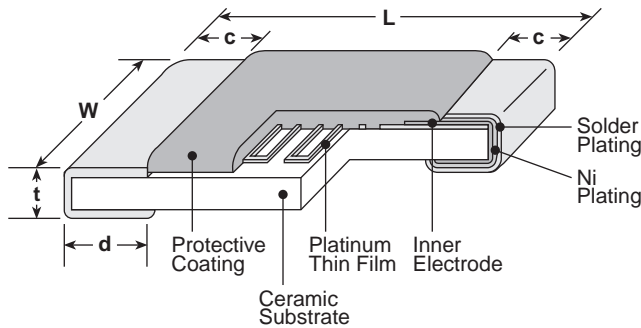

| Type (Inch Size Code) | Dimensions inches (mm) | | | | |
|--------------------------|------------------------|------------------------|-----------------------|-----------------------|------------------------|
| | L | W | c | d | t |
| 2B (1206) | .126±.008 (3.2±0.2) | .063±.008 (1.6±0.2) | .02±.012 (0.5±0.3) | .02±.012 (0.5±0.3) | .02±.006 (0.5±0.15) |

thermal sensors

ordering information

| | | | | | | |
|---------------|-----------|----------------------|---|------------------------|----------------------|--------------------------------|
| SDT73V | 2B | T | TE | 100 | F | 385 |
| Type | Size Code | Termination Material | Packaging | Nominal Resistance | Resistance Tolerance | T.C.R. (x 10 ⁻⁶ /K) |
| | 2B: 1206 | T: Sn | TEK: 4mm pitch plastic embossed (1,000 pieces/reel) TE: 4mm pitch plastic embossed (5,000 pieces/reel) | 100: 100Ω 500: 500Ω | C: ±0.2% F: ±1% | 385: +3850 |

applications and ratings

| Part Designation | Resistance @ 0°C | Resistor Tolerance | Thermal Time Constant ¹ | Thermal Dissipation Constant ¹ | T.C.R. (ppm/°C) ² | T.C.R. Tolerance (ppm/°C) | Specified Current ³ | Operating Temperature Range |
|------------------|------------------|--------------------|------------------------------------|---|------------------------------|---------------------------|------------------------------------|-----------------------------|
| SDT73V 2B | 100Ω 500Ω | C: ±0.2% F: ±1% | 6.5 seconds | 2.4mW/°C | 3850 | ±50 | 1mA Max.: 100Ω 0.1mA Max.: 500Ω | -55°C to +155°C |

¹ Thermal time constant and thermal dissipation constant are reference values, which are values of elements and vary with connecting or fixing methods. Thermal dissipation constant is approx. 4mW/°C under the surface mounting condition.

² T.C.R. measuring temperature: 0°C/+ 100°C

³ The electricity which it is charged with in the element is moved to the range that rise in temperature due to a self-heat generation can be ignored. Ordinarily recommended measuring currents are 1mA for 100Ω and 0.1mA for 500Ω.


For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/07/23

environmental applications

Temperature Characteristics

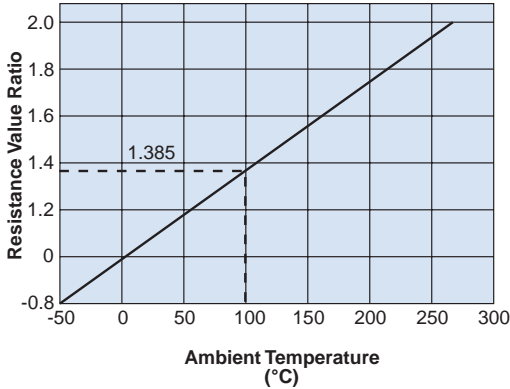

Approximate Expression for Resistance-Temperature Characteristics
 -55°C~0°C : $R_T = R_0 \{1 + C_1 T + C_2 T^2 + C_3 (T-100) T^3\}$
 0°C~+155°C : $R_T = R_0 (1 + C_1 T + C_2 T^2)$

R_T : Resistance value at T°C
 R_0 : Resistance value at 0°C
 T : Ambient temperature(°C)

Constants C_1, C_2, C_3 :
 $C_1 = 3.9083 \times 10^{-3} \text{ } ^\circ\text{C}^{-1}$
 $C_2 = -5.775 \times 10^{-7} \text{ } ^\circ\text{C}^{-2}$
 $C_3 = -4.183 \times 10^{-12} \text{ } ^\circ\text{C}^{-4}$

Pt100 Resistance - Temperature Characteristic (IEC 60751⁻¹⁹⁹⁵) 100Ω at 0°C

| Temperature (°C) | 0 | -1 | -2 | -3 | -4 | -5 | -6 | -7 | -8 | -9 |
|------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| -50 | 80.31 | 79.91 | 79.51 | 79.11 | 78.72 | 78.32 | — | — | — | — |
| -40 | 84.27 | 83.87 | 83.48 | 83.08 | 82.69 | 82.29 | 81.89 | 81.50 | 81.10 | 80.70 |
| -30 | 88.22 | 87.83 | 87.43 | 87.04 | 86.64 | 86.25 | 85.85 | 85.46 | 85.06 | 84.67 |
| -20 | 92.16 | 91.77 | 91.37 | 90.98 | 90.59 | 90.19 | 89.80 | 89.40 | 89.01 | 88.62 |
| -10 | 96.09 | 95.69 | 95.30 | 94.91 | 94.52 | 94.12 | 93.73 | 93.34 | 92.95 | 92.55 |
| 0 | 100.00 | 99.61 | 99.22 | 98.83 | 98.44 | 98.04 | 97.65 | 97.26 | 96.87 | 96.48 |
| | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| 0 | 100.00 | 100.39 | 100.78 | 101.17 | 101.56 | 101.95 | 102.34 | 102.73 | 103.12 | 103.51 |
| 10 | 103.90 | 104.29 | 104.68 | 105.07 | 105.46 | 105.85 | 106.24 | 106.63 | 107.02 | 107.40 |
| 20 | 107.79 | 108.18 | 108.57 | 108.96 | 109.35 | 109.73 | 110.12 | 110.51 | 110.90 | 111.29 |
| 30 | 111.67 | 112.06 | 112.45 | 112.83 | 113.22 | 113.61 | 114.00 | 114.38 | 114.77 | 115.15 |
| 40 | 115.54 | 115.93 | 116.31 | 116.70 | 117.08 | 117.47 | 117.86 | 118.24 | 118.63 | 119.01 |
| 50 | 119.40 | 119.78 | 120.17 | 120.55 | 120.94 | 121.32 | 121.71 | 122.09 | 122.47 | 122.86 |
| 60 | 123.24 | 123.63 | 124.01 | 124.39 | 124.78 | 125.16 | 125.54 | 125.93 | 126.31 | 126.69 |
| 70 | 127.08 | 127.46 | 127.84 | 128.22 | 128.61 | 128.99 | 129.37 | 129.75 | 130.13 | 130.52 |
| 80 | 130.90 | 131.28 | 131.66 | 132.04 | 132.42 | 132.80 | 133.18 | 133.57 | 133.95 | 134.33 |
| 90 | 134.71 | 135.09 | 135.47 | 135.85 | 136.23 | 136.61 | 136.99 | 137.37 | 137.75 | 138.13 |
| 100 | 138.51 | 138.88 | 139.26 | 139.64 | 140.02 | 140.40 | 140.78 | 141.16 | 141.54 | 141.91 |
| 110 | 142.29 | 142.67 | 143.05 | 143.43 | 143.80 | 144.18 | 144.56 | 144.94 | 145.31 | 145.69 |
| 120 | 146.07 | 146.44 | 146.82 | 147.20 | 147.57 | 147.95 | 148.33 | 148.70 | 149.08 | 149.46 |
| 130 | 149.83 | 150.21 | 150.58 | 150.96 | 151.33 | 151.71 | 152.08 | 152.46 | 152.83 | 153.21 |
| 140 | 153.58 | 153.96 | 154.33 | 154.71 | 155.08 | 155.46 | 155.83 | 156.20 | 156.58 | 156.95 |
| 150 | 157.33 | 157.70 | 158.07 | 158.45 | 158.82 | 159.19 | — | — | — | — |

Note: Desired temperature values are obtained by adding temperatures in the vertical and horizontal axes. When calculating a resistance value of 105°C, read the value in the column where 100°C in the vertical axis and 5°C in the horizontal axis cross. The value will be 140.40Ω. The value for 500Ω at 0°C will be the value obtained by multiplying the resistance value in this table by 5.

Performance Characteristics

| Parameter | Requirement Δ R ±(%+0.05Ω) | | Test Method |
|-----------------------------|--------------------------------|---------|--|
| | Limit | Typical | |
| Resistance | Within specified tolerance | — | 0°C |
| T.C.R. | 3850±50 (x10 ⁻⁶ /K) | — | 0°C/+100°C |
| Resistance to Solder Heat | ±0.5% | -0.004% | 260°C for 10 seconds |
| Solderability | 95% Coverage Min. | — | 235°C±5°C, 3 seconds ± 0.5 seconds |
| Terminal Strength | ±0.5% | -0.011% | 1.8kg force is kept on the samples for 60 seconds |
| Rapid Change of Temperature | ±0.5% | -0.058% | -55°C (30 minutes)/ +25°C (2 - 3 minutes)/ +155°C (30 minutes)/ +25°C (2 - 3 minutes), 1000 cycles |
| Thermal Shock | ±0.5% | -0.032% | -55°C (15 minutes)/ +155°C (15 minutes), 300 cycles |
| Moisture Resistance | ±0.5% | -0.041% | 25°C, -65°C (90 - 100% RH), t= 24 hours/cycle. Unpowered. It is carried out 10 times. |
| Biased Humidity | ±0.5% | -0.016% | 85°C, 85% RH, 1000 hours, 1mA, 1.5 hr ON, 0.5 hr OFF cycle |
| High Temperature Exposure | ±0.5% | -0.022% | +155°C, 1000 hours |
| High Temperature Load Life | ±0.5% | -0.017% | 155°C, 1000 hours, 1mA continuous turning on electricity |
| Mechanical Shock | ±0.5% | -0.001% | 100gs Maximum, 6Dms (Standard), 12.3 feet/second |
| Vibration | ±0.5% | -0.009% | Test from 10-2000Hz, 5g's for 20 minutes, 12 cycles each of 3 orientations |