


wide terminal type flat chip resistors (anti sulfuration)



features

- Anti-sulfuration type, wide-side termination (reverse-geometry) type flat chip resistor
- Excellent anti-sulfuration characteristic due to using high sulfuration-proof inner top electrode material
- Suitable for both flow and reflow solderings
- Products meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Tested

dimensions and construction

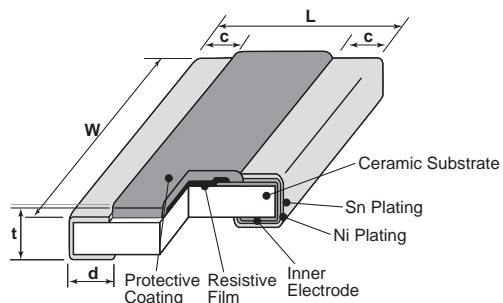

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
2A (0508)	.049±.006 (1.25±0.15)	.079±.006 (2.0±0.15)	.012±.008 (0.3±0.2)	.014±.008 (0.35±0.2)	.022±.004 (0.55±0.1)
2B (0612)	.063±.008 (1.6±.0.2)	.126±.012 (3.2±.0.3)	.012±.008 (0.3±0.2)	.018±.006 (0.45±0.15)	.024±.004 (0.6±0.1)
2H (1020)	.098±.008 (2.5±.0.2)	.197±.008 (5.0±.0.2)	.016±.008 (0.4±0.2)	.030±.006 (0.75±0.15)	
3A (1225)	.122±.004 (3.1±.0.1)	.248±.006 (6.3±0.15)	.018±.008 (0.45±0.2)	.030±.006 (0.75±0.15)	.024±.004 (0.6±0.1)

ordering information

WK73R	2B	R	T	TD	10R0	F
Type	Size	Characteristic	Termination Material	Packaging	Nominal Resistance*	Resistance Tolerance
WK73S WK73R	2A: 0.75W ¹ , 1W ¹ , 1.25W ¹ 2B: 0.75W, 1.5W ¹ 2H: 1W, 2W ¹ , 3W ¹ 3A: 1.5W, 3W ¹ , 4W ¹	R: Anti-Sulfur	T: Sn	TD: 4mm pitch punched paper TE: 4mm pitch embossed plastic For further information on packaging, please refer to Appendix A	±1%: 4 digits ±5%: 3 digits	F: ±1% J: ±5%

¹ If you use at the rated power, please keep the condition that the terminal of the resistor is below the rated terminal part temperature. Please refer to the derating curves based on the terminal temperature on the next page.

* Resistance value, 3 digits:
1~9.1Ω, 1R0~9R1
Resistance value, 4 digits:
1~9.76Ω, 1R00~9R76

applications and ratings




Part Designation	Power Rating	Rated Ambient Temperature	Rated Terminal Part Temperature	T.C.R. (X 10 ⁻⁶ /K)	Resistance Range (Ω)		Maximum Working Voltage	Maximum Overload Voltage	Operating Temperature Range
					F±1% E-24 • E-96	J±5% E-24			
WK73S2A (0508)	1.25W ¹	—	125°C	±100	1 ~ 9.76	1 ~ 9.1	200V	400V	-55°C to +155°C
WK73R2A (0508)	0.75W ¹	70°C	125°C	±100	20.5k ~ 1M	22k ~ 1M			
	1.0W ¹	—	125°C	±100	10 ~ 20k	10 ~ 20k			
WK73S2B (0612)	0.75W	70°C	125°C	±100	1 ~ 9.76	1 ~ 9.1			
	1.5W ¹	—	125°C	±100 ±150	1 ~ 9.76 0.3 ~ 0.976	1 ~ 9.1 0.3 ~ 0.91			
WK73R2B (0612)	0.75W	70°C	125°C	±100	10 ~ 9.76k	10 ~ 9.1k			
	1.5W ¹	—	125°C	±100	10k ~ 1M 10 ~ 9.76k	10k ~ 1M 10 ~ 9.1k			
WK73S2H (1020)	1.0W	70°C	125°C	±100	1 ~ 9.76k	1 ~ 9.1			
	3W ^{*1}	—	125°C	±100 ±200	1 ~ 9.76k 0.2 ~ 0.976	1 ~ 9.1 0.2 ~ 0.91			
WK73R2H (1020)	1.0W	70°C	125°C	±100	10 ~ 430k	10 ~ 430k			
	2W ^{*1}	—	125°C	±100 ±200	432k - 1M 10 ~ 430k	470k - 1M 10 ~ 430k			
WK73S3A (1225)	1.5W	70°C	125°C	±100	1 ~ 9.76	1 ~ 9.1			
	4.0W ¹	—	125°C	±100	1 ~ 9.76	1 ~ 9.1			
WK73R3A (1225)	1.5W	70°C	125°C	±100	10 ~ 330k	10 ~ 330k			
	3W ¹	—	125°C	±100 ±200	332k - 1M 10 ~ 330k	360k - 1M 10 ~ 330k			

Rated voltage = $\sqrt{\text{Power rating} \times \text{resistance value}}$ or max. working voltage, whichever is lower

¹ When using Power Rating, please use the derating curves based on the terminal part temperature below.

If any questions should arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature", please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to the "Introduction of the derating curves based on the terminal part temperature" in the beginning of the catalog.

Derating Curve

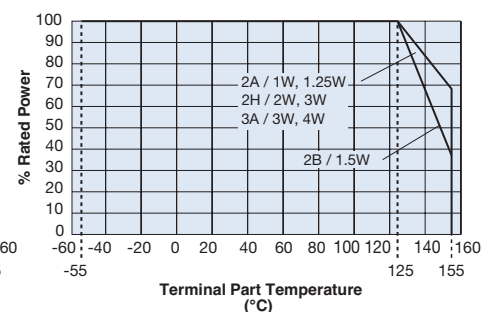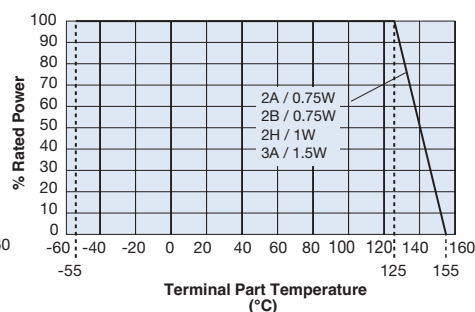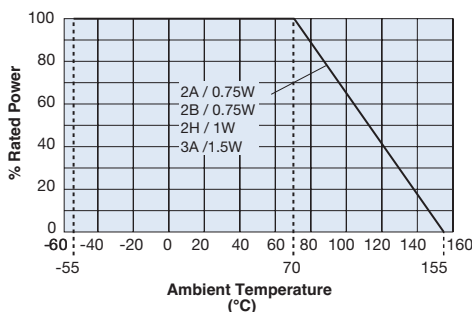


For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

When the terminal part temperature of the resistor exceeds the rated terminal part temperature shown above, the power shall be derated according to the derating curve.


Please refer to "Introduction of the derating curves based on the terminal part temperature" in the beginning of the catalog before use.

wide terminal type flat chip resistors (anti sulfuration)

Temperature Rise

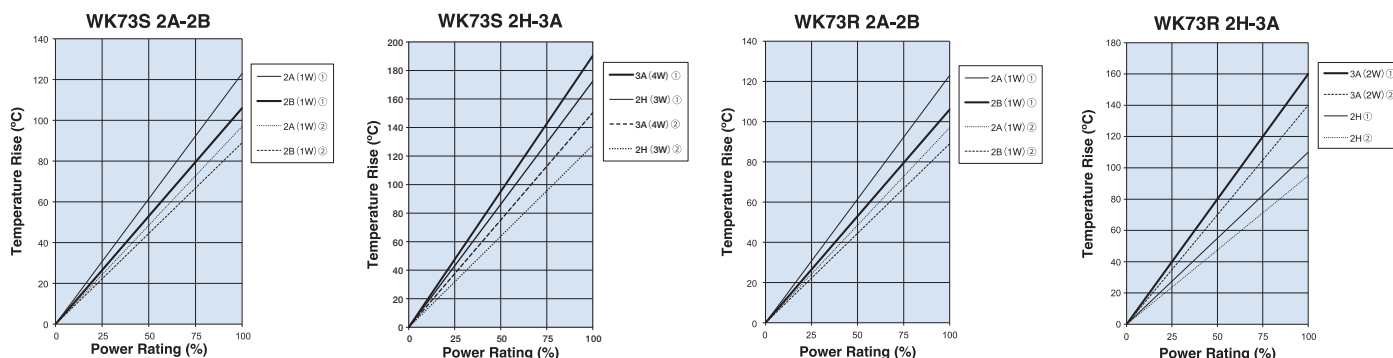


Simulated and Measurement Conditions



Temperature rise is simulated and measured under our conditions. So, the values will vary depending on the operating conditions and PCB used.

One-Pulse Limiting Electric Power

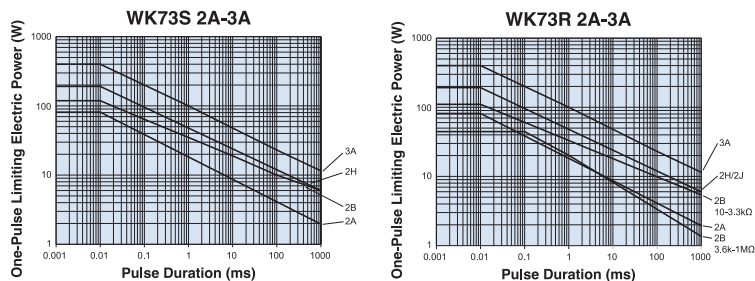

The maximum applicable voltage is equal to the max. overload voltage.

Please ask us about the resistance characteristic of continuous applied pulse.

The pulse endurance values are not assured values, so be sure to check the products on actual equipment when you use them.

environmental applications

Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.005\Omega)$		Test Method																					
	Limit	Typical																						
Resistance	Within specified tolerance	—	25°C																					
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C and +25°C/+125°C																					
Overload (Short time)	$\pm 2\%$	$\pm 0.2\%$	Overload wattage for 5s <table border="1"> <tr> <td>Type</td> <td colspan="2">2A</td> <td colspan="2">2B</td> <td>2H</td> <td>3A</td> </tr> <tr> <td>(Resistance Range/Ω)</td> <td>1~20k</td> <td>20.5k~1M</td> <td>1~10k</td> <td>10.2k~1M</td> <td>8W</td> <td>12W</td> </tr> <tr> <td>Overload Wattage</td> <td>4W</td> <td>3W</td> <td>6W</td> <td>4.688W</td> <td></td> <td></td> </tr> </table>	Type	2A		2B		2H	3A	(Resistance Range/ Ω)	1~20k	20.5k~1M	1~10k	10.2k~1M	8W	12W	Overload Wattage	4W	3W	6W	4.688W		
Type	2A		2B		2H	3A																		
(Resistance Range/ Ω)	1~20k	20.5k~1M	1~10k	10.2k~1M	8W	12W																		
Overload Wattage	4W	3W	6W	4.688W																				
Resistance to Solder Heat	$\pm 1\%$	$\pm 0.2\%$	260°C \pm 5°C, 10 seconds \pm 1 second																					
Bending Test	$\pm 1\%$	$\pm 0.1\%$	Holding point 90mm, Bending 1 time, Bending 5mm																					
Rapid Change of Temperature	$\pm 2\%$	$\pm 1\%$	-55°C (30 minutes) / +125°C (30 minutes), 100 cycles																					
Moisture Resistance	$\pm 2\%$	$\pm 0.2\%$	40°C \pm 2°C, 90%~95% RH, 1000 hours; 1.5 hr ON, 0.5 hr OFF cycle																					
Endurance at 70°C	$\pm 2\%$	$\pm 0.2\%$	70°C \pm 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle																					
High Temperature Exposure	$\pm 1\%$	$\pm 0.2\%$	+155°C, 1000 hours																					
Sulfuration Test	$\pm 5\%$	$\pm 0.2\%$	Soaked in industrial oil with 3.5% sulfur concentration 105°C \pm 3°C, 500 hours																					

Please refer to conventional products for characteristic data such as temperature rise.

Additional environmental applications can also be found at www.koaspeer.com

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

3/20/25